

TriStar™















- Locked
- Anti Slip Coating (60+ PSRV)
- Ventilation Holes
- Sealing Plate
- Safety Grill
- · Alternative Badging
- Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- It is the responsibility of all users to satisfy
- themselves the above data is current. Installation details are available on request. Published March 2017 Version 2.AC







TriStar

Ductile Iron D400 Access Covers

The Tristar range of D400 Ductile Iron access covers fully comply with BS EN 124:2015 and carry the British Standard Kitemark. Tristar also possesses some innovative design features that mark it out from the competition.

- Ror use in a Group 4 D400 class environment
- Third party certified by BSI
- 😭 Safety keyway Ensures key's secure in keyway when lifting
- Enlarged frame corners help to dissipate the load
- Non rock Three point suspension for non rock stability
- Manufactured from strong and highly durable ductile iron

| WREKIN PRODUCT CODE | CLEAR OPENING SIZE (C x D mm) | FRAME DEPTH (mm) | OVER FRAME SIZE (A x B mm) |
|---------------------|----------------------------------|---------------------|-------------------------------|
| DMT0D4/4545/KT | 450 x 450 | 100 | 570 x 570 |
| DMT0D4/6045/KT | 600 x 450 | 100 | 740 x 590 |
| DMT0D4/6060/KT | 600 x 600 | 100 | 720 x 720 |
| DMT0D6/6060/KT | 600 x 600 | 150 | 720 x 720 |
| DMT0D4/6767/KT | 675 x 675 | 100 | 800 x 800 |
| DMT0D6/6767/KT | 675 x 675 | 150 | 800 x 800 |


Available options: SW or FW integrally badged on 600 x 600 & 675 x 675s.







Dimensions:

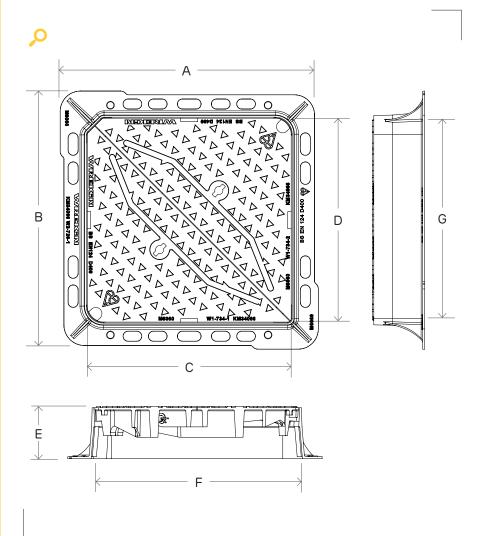



| Diagram Key | | |
|-------------|--------------------|--|
| AxB | Overall Frame Size | |
| CxD | Clear Area | |
| FxG | Base Opening | |
| Е | Frame Height | |